


ASTM A182 NPT Thread Flange, RF, Golden Coated

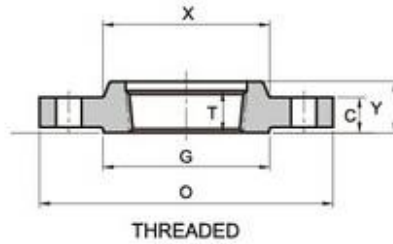

Normal Diam.		O.D. Flange	Thk. of Flange Min	Diam. Of Hub	Diameter of Raised Face	Length Hub	Thread Length	Diam. of Bolt Circle	Diam. of Bolt Holes	Number of Bolts	Diam. of Bolts (inch)	Approx. Weight	
inch	dn	O	C	X	G	Y	T	BC	BH	BN	BD	KG/PCS	LB/PCS
1/2"	15	95.5	14.2	38.1	35.1	22.4	22.4	66.5	15.7	4	1/2"	0.9	2
3/4"	20	117.5	15.7	47.8	42.9	25.4	27.7	82.6	19.1	4	5/8"	1.4	3.1
1"	25	124.0	17.5	53.8	50.8	26.9	34.5	88.9	19.1	4	5/8"	1.8	4
1-1/4"	32	133.5	20.6	63.5	63.5	28.4	43.2	98.6	19.1	4	5/8"	2.3	5
1-1/2"	40	155.5	22.4	69.9	73.2	31.8	49.5	114.3	22.4	4	3/4"	3.3	7.3
2"	50	165.0	25.4	84.1	91.9	36.6	62	127	19.1	8	5/8"	4	8.8
2-1/2"	65	190.5	28.4	100.1	104.6	41.1	74.7	149.4	22.4	8	3/4"	5.5	12.1
3"	80	209.5	31.8	117.3	127	46	90.7	168.1	22.4	8	3/4"	7.4	16.3
3-1/2"	90	228.5	35.1	133.4	139.7	49.3	103.4	184.2	25.4	8	7/8"	9.2	20.2
4"	100	273.0	38.1	152.4	157.2	53.8	116.1	215.9	25.4	8	7/8"	16.8	37
5"	125	330.0	44.5	189	185.7	60.5	143.8	266.7	28.4	8	1"	28.5	62.8
6"	150	355.5	47.8	222.3	215.9	66.5	170.7	292.1	28.4	12	1"	36.2	79.8
8"	200	419.0	55.6	273.1	269.7	76.2	221.5	349.3	31.8	12	1 1/8"	21.5	114
10"	250	508.0	63.5	342.9	323.9	85.9	276.4	431.8	35.1	16	1 1/4"	76.2	168
12"	300	559.0	66.5	400.1	381	91.9	327.2	489	35.1	20	1 1/4"	89.5	197
14"	350	603.5	69.9	431.8	412.8	93.7	359.2	527.1	38.1	20	1 3/8"	102	225
16"	400	686.0	76.2	495.3	469.9	106.4	410.5	603.3	41.1	20	1 1/2"	150	330
18"	450	743.0	82.6	546.1	533.4	117.3	461.8	654.1	44.5	20	1 5/8"	180	397
20"	500	813.0	88.9	609.6	584.2	127.0	513.1	723.9	44.5	24	1 5/8"	231	509
24"	600	940.0	101.6	717.6	692.2	139.7	616	838.2	50.8	24	1 7/8"	330	727

Source: <http://www.landeeflange.com>

Landeeflange.com has won fully trust from clients by providing the best flanges. Our service mission is to achieve 100% customer satisfaction.