


ANSI B16.47A WN Flange, PN100, DN650, RF

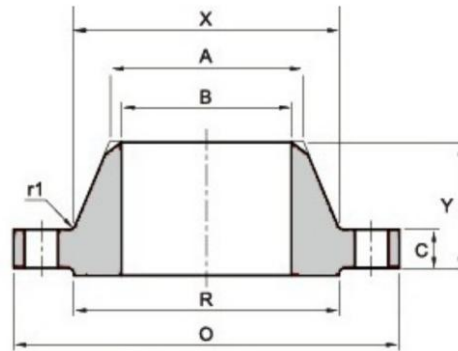

Pipe Normal Diam.	O.D. of Flange	Thickness	Length Through Hub	Diam. of Hub at Base	Hub Diam. Top	Raised Face Diam.	Diam. of Bolt Circle	No. of Bolt Holes	Diam. of Bolt Holes	Diam. of Bolt	Fillet Radius Min.
inch	O	C	Y	X	A	R	BD	BN	BH	DB	r1
26"	1016	108	222.3	747.8	660.4	749.3	914.4	28	50.8	1 7/8	12.7
28"	1073.2	111.3	235	803.1	711.2	800.1	965.2	28	53.8	2	12.7
30"	1130.3	114.3	247.7	862.1	762	857.3	1022.4	28	53.8	2	12.7
32"	1193.8	117.3	260.4	917.4	812.8	914.4	1079.5	28	60.5	2 1/4	12.7
34"	1244.6	120.7	269.7	973.1	863.6	965.2	1130.3	28	60.5	2 1/4	14.2
36"	1314.5	124	282.4	1031.7	914.4	1022.4	1193.8	28	66.5	2 1/2	14.2
38"	1270	152.4	254	1022.4	965.2	1054.1	1162.1	28	60.5	2 1/4	14.2
40"	1320.8	158.8	263.7	1073.2	1016	1111.3	1212.9	32	60.5	2 1/4	14.2
42"	1403.4	168.1	279.4	1127.3	1066.8	1168.4	1282.7	28	66.5	2 1/2	14.2
44"	1454.2	173	289.1	1181.1	1117.6	1225.6	1333.5	32	66.5	2 1/2	14.2
46"	1511.3	179.3	300	1234.9	1168.4	1276.4	1390.7	32	66.5	2 1/2	14.2
48"	1593.9	189	316	1289.1	1219.2	1333.5	1460.5	32	73.2	2 3/4	14.2
50"	1670.1	196.9	328.7	1343.2	1270	1384.3	1524	28	79.2	3	14.2
52"	1720.9	203.2	336.6	1394	1320.8	1435.1	1574.8	32	79.2	3	14.2
54"	1778	209.6	349.3	1447.8	1371.6	1492.3	1632	32	79.2	3	14.2
56"	1854.2	217.4	362	1501.6	1422.4	1543.1	1695.5	32	85.9	3 1/4	15.7
58"	1905	222.3	369.8	1552.4	1473.2	1600.2	1746.3	32	85.9	3 1/4	15.7
60"	1993.9	233.4	388.9	1609.9	1524	1657.4	1822.5	28	91.9	3 1/2	17.5

Source: <http://www.landeeflange.com>

Landeeflange.com has won fully trust from clients by providing the best flanges. Our service mission is to achieve 100% customer satisfaction.