


ASME A105N WN Flange, 26 Inch, Class 600

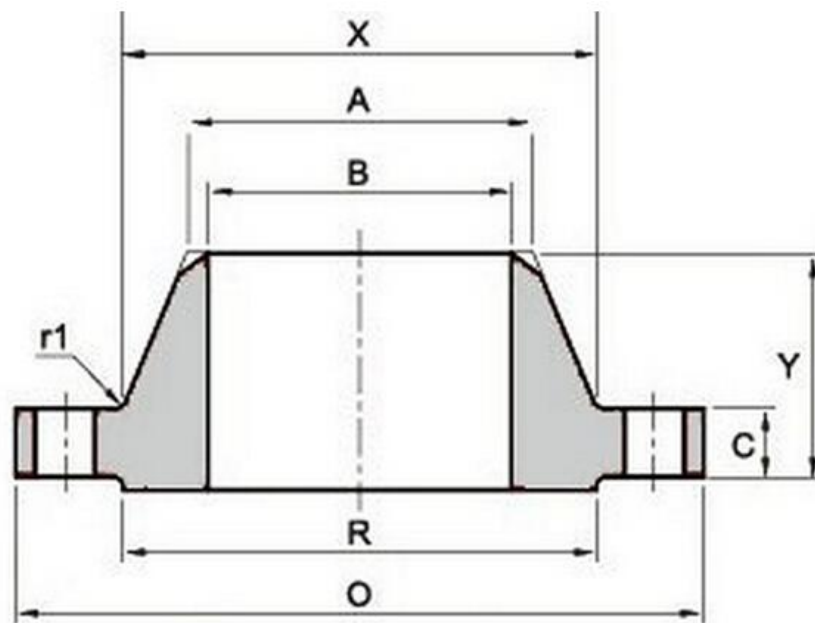

Pipe Normal Diam.	O.D. of Flange	Thickness	Length Through Hub	Diam. of Hub at Base	Hub Diam. Top	Raised Face Diam.	Diam. of Bolt Circle	No. of Bolt Holes	Diam. of Bolt Holes	Diam. of Bolt	Fillet Radius Min.
inch	O	C	Y	X	A	R	BD	BN	BH	DB	r1
26"	971.6	79.2	184.2	720.9	660.4	749.3	876.3	28	44.5	1 5/8	9.7
28"	1035.1	85.9	196.9	774.7	711.2	800.1	939.8	28	44.5	1 5/8	11.2
30"	1092.2	91.9	209.6	827	762	857.3	997	28	47.8	1 3/4	11.2
32"	1149.4	98.6	222.3	881.1	812.8	914.4	1054.1	28	50.8	1 7/8	11.2
34"	1206.5	101.6	231.6	936.8	863.6	965.2	1104.9	28	50.8	1 7/8	12.7
36"	1270	104.6	241.3	990.6	914.4	1022.4	1168.4	32	53.8	2	12.7
38"	1168.4	108	180.8	993.6	965.2	1028.7	1092.2	32	41.1	1 1/2	12.7
40"	1238.3	114.3	193.5	1047.8	1016	1085.9	1155.7	32	44.5	1 5/8	12.7
42"	1289.1	119.1	200.2	1098.6	1066.8	1136.7	1206.5	32	44.5	1 5/8	12.7
44"	1352.6	124	206.2	1149.4	1117.6	1193.8	1263.7	32	47.8	1 3/4	12.7
46"	1416.1	128.5	215.9	1203.5	1168.4	1244.6	1320.8	28	50.8	1 7/8	12.7
48"	1466.9	133.4	223.8	1254.3	1219.2	1301.8	1371.6	32	50.8	1 7/8	12.7
50"	1530.4	139.7	231.6	1305.1	1270	1358.9	1428.8	32	53.8	2	12.7
52"	1581.2	144.5	238.3	1355.9	1320.8	1409.7	1479.6	32	53.8	2	12.7
54"	1657.4	152.4	252.5	1409.7	1371.6	1466.9	1549.4	28	60.5	2 1/4	12.7
56"	1708.2	153.9	260.4	1463.5	1422.4	1517.7	1600.2	28	60.5	2 1/4	12.7
58"	1759	158.8	266.7	1514.3	1473.2	1574.8	1651	32	60.5	2 1/4	12.7
60"	1809.8	163.6	273.1	1565.1	1524	1625.6	1701.8	32	60.5	2 1/4	12.7

Sourcing: <http://www.landeeflange.com/>

Landeeflange.com has won fully trust from clients by providing the best flanges. Our service mission is to achieve 100% customer satisfaction.