


ASME B16.5 Weld Neck Flange, 12 Inch, 300 LB, RF

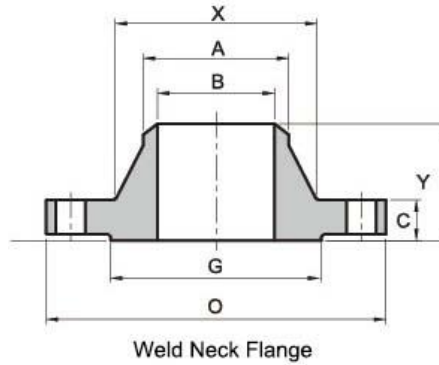

Pipe Normal Diam.		O.D. Flange	Thk. of Flange Min	Diam. of Hub	Diameter of Raised Face	Hub Diam. Chamfer of W.N	Length Hub.Y	Bore	Diam. of Bolt Circle	Diam. of Bolt Holes	Number of Bolts	Diam. of Bolts (inch)	Approx. Weight	
inch	dn	O	C	X	G	A	Y	B	BC	BH	BN	BD	KG/PCS	LB/PCS
1/2"	15	95.5	14.2	38.1	35.1	21.3	52.3	15.7	66.5	15.7	4	1/2"	0.8	1.8
3/4"	20	117.5	15.7	47.8	42.9	26.7	57.2	20.8	82.6	19.1	4	5/8"	1.4	3.1
1"	25	124.0	17.5	53.8	50.8	33.5	62	26.7	88.9	19.1	4	5/8"	1.7	3.7
1-1/4"	32	133.5	19.1	63.5	63.5	42.2	65	35.1	98.6	19.1	4	5/8"	2.2	4.8
1-1/2"	40	155.5	20.6	69.9	73.2	48.3	68.3	40.9	114.3	22.4	4	5/8"	3.2	7
2"	50	165.0	22.4	84.1	91.9	60.5	69.9	52.6	127	19.1	8	5/8"	3.6	7.9
2-1/2"	65	190.5	25.4	100.1	104.6	73.2	76.2	62.7	149.4	22.4	8	3/4"	5.4	12
3"	80	209.5	28.4	117.3	127	88.9	79.2	78	168.1	22.4	8	3/4"	7.3	16.1
3-1/2"	90	228.5	30.2	133.4	139.7	101.6	81	90.2	184.2	22.4	8	3/4"	8.9	19.6
4"	100	254.0	31.8	146.1	157.2	114.3	85.9	102.4	200.2	22.4	8	3/4"	11.8	26
5"	125	279.5	35.1	177.8	185.7	141.2	98.6	128.3	235	22.4	8	3/4"	16	35.2
6"	150	317.5	36.6	206.2	215.9	168.4	98.6	154.2	269.7	22.4	12	3/4"	20.2	44.6
8"	200	381.0	41.1	260.4	269.7	219.2	111.3	202.7	330.2	25.4	12	7/8"	31.2	68.8
10"	250	444.5	47.8	320.5	323.9	273.1	117.3	254.5	387.4	28.4	16	1"	44.3	97.5
12"	300	520.5	50.8	374.7	381	323.9	130.0	304.8	450.9	31.8	16	1 1/8"	63.5	140
14"	350	584.0	53.8	425.5	412.8	355.6	142.7		514.4	31.8	20	1 1/8"	86	190
16"	400	647.5	57.2	482.6	469.9	406.4	146.1		571.5	35.1	20	1 1/4"	112	247
18"	450	711.0	60.5	533.4	533.4	457.2	158.8		628.7	35.1	24	1 1/4"	141	310
20"	500	774.5	63.5	587.2	584.2	508	162.1		685.8	35.1	24	1 1/4"	173	382
24"	600	914.5	69.9	701.5	692.2	609.6	168.1		812.8	41.1	24	1 1/2"	248	546

Source: <http://www.landeeflange.com>

Landeeflange.com has won fully trust from clients by providing the best flanges. Our service mission is to achieve 100% customer satisfaction.